



PRIMACY LAMINATION



THE IDEAL SYSTEM FOR PERSONALIZING AND LAMINATING YOUR CARDS

Primacy Lamination is an all-in-one, affordable system for encoding, printing, and laminating your cards, with or without holograms. Your ID cards will have maximum durability and an increased level of security, hence reducing the amount of fraudulent actions.

Primacy Lamination prints and laminates up to 215 single-sided cards per hour.

CARD DURABILITY

- After your cards have been encoded and printed, Primacy Lamination then heat seals a film (varnish or patch of varying thickness) over the surface of the card.
- Lamination adds durability to your cards and increases their life cycle by up to 10 years*.


INCREASED SECURITY

- Evolis has a wide range of patches and laminates, with or without holograms. For added security, our teams can develop entirely personalized laminates.
- Primacy Lamination can handle different encoding modules: magnetic stripe, contact or contactless smart cards. These encoding options can be combined.

EASY TO USE

- When you install your system, you connect the lamination module to the printer in one easy step by infrared communication. The system ensures that you are up and running with a quick warm up time.
- Printing ribbons and lamination films are installed intuitively and are automatically recognized by the system.

*Under specific conditions

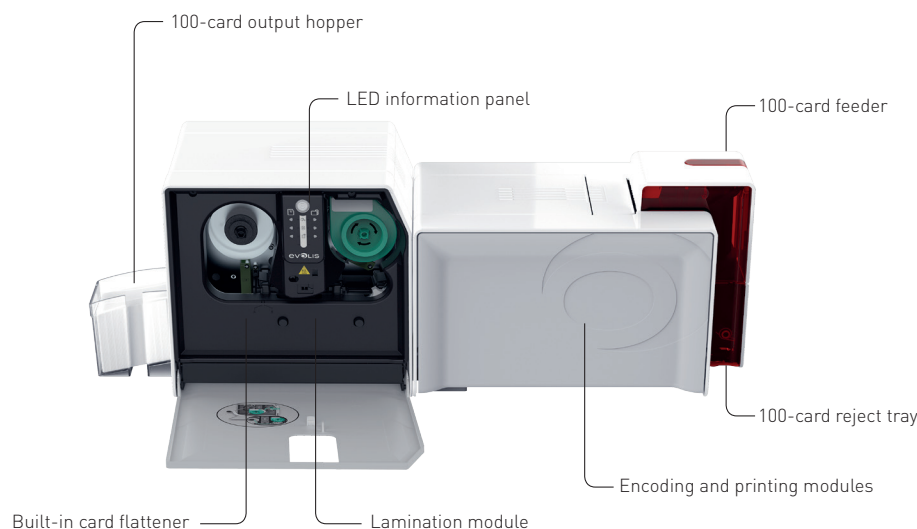

evolis



MAIN FEATURES / Full technical specifications on www.evolis.com

GENERAL FEATURES

- Direct-to-card dye-sublimation/Resin thermal transfer
- Single or double sided printing, edge-to-edge
- Standard 300 x 300 dpi resolution
- Customizable 300 x 600 dpi resolution (color and monochrome printing) or 300 x 1200 dpi resolution (monochrome printing only)
- 32 MB memory (RAM) standard - optional 64 MB¹
- Single and double sided (via flip over) lamination in standard
- Standard built-in card flattener
- Lamination through infrared quartz tube and silicon compound coating heat roll

PRINTING AND LAMINATION PERFORMANCES¹

- Single side: up to 215 cards/hour
- Dual side (YMCKO-K): up to 110 cards/hour

CARD MANAGEMENT AND SPECIFICATIONS

- Feeder capacity: 100 cards (0.76 mm - 30 mil)
- Output hopper capacity: 100 cards (0.76 mm - 30 mil)
- Reject tray capacity: 100 cards (0.76 mm - 30 mil)
- Card thickness: 0.76 mm (30 mil)
- Card types: PVC cards, composite PVC cards, PET cards, polycarbonate cards¹, special varnished cards¹
- Card format: ISO CR80 - ISO 7810 (53.98 mm x 85.60 mm)

INTERFACES

- USB (1.0, 1.1, 2.0, 3.0), cable supplied
- Ethernet TCP-IP 10BaseT, 100BaseT (Traffic Led)
- 802.11b/g wireless connection on the Wireless range

DISPLAY

- Printer LEDs
- Graphical notifications²: cleaning alerts, empty/low level ribbon, etc
- Color touch screen display as an option

¹ Under specific conditions / ² Depends on the Windows® version / ³ Requires the .net 4.0 client profile version
⁴ Warranty subject to observance of specific conditions and use of Evolis High Trust® ribbons and films

SAFETY

- Support for Kensington® security lock
- Data encryption for magnetic encoding

SOFTWARE

- Delivered with Evolis Premium Suite® for Windows®:
 - Printer driver
 - Evolis Print Center for administration and settings
 - Evolis Printer Manager for graphical notification³
 - 24/7 online support
 - Compatible with Windows® (32/64 bits): XP SP3, Vista, W7, W8, W10
- Delivered with cardPresso XXS for designing and editing badges (internal database with unlimited records)
- Evolis Premium SDK for remote supervision of the printer, while facilitating and speeding up integration into IT systems

EVOLIS HIGH TRUST® RIBBONS

To maximize the quality and durability of printed cards, the lifespan of the print head and the overall printer and lamination module reliability, use Evolis High Trust® ribbons and films.

- Automatic identification and setting
- Ergonomic ribbons and films for easy handling
- Ribbon saver for monochrome printing
- Lamination films:
 - Clear or holographic patch (0.5, 0.6 or 1 mil): 600 sides/roll
 - Clear or holographic varnish: 1200 sides/roll
 - Other films upon request
 - Alternate film to laminate cards with magnetic stripe or smart cards

List of ribbons and films available on www.evolis.com

OPTION

- Card Lamination Module (CLM) sold separately as an add-on for any Primacy printer
- Installation of a second Card Lamination Module (CLM) to laminate both sides of the card with two different films

ADDITIONAL ENCODING MODULES

- Available modules:
 - Magnetic stripe encoder ISO 7811 HiCo/LoCo, JIS2
 - Smart contact station ISO 7816-2
 - Contact smart card encoder - PC/SC, EMV 2000-1
 - Contactless smart card encoder - ISO 14443A, B, ISO15693, MIFARE, DESFire, HID iCLASS, UHF (standard compliance: EPC C1 Gen2 / ISO18000-6C ETSI EN 302 208 or FCC part 15.247)
 - Other specific encoders upon request
- Internal USB or IP ports
- Options can be combined
- Factory-installed or installed on site

CERTIFICATIONS AND STATEMENT OF COMPLIANCE

- CE, FCC, ICES, VCCI, CCC, KC, BIS
- RoHS

SIZE AND WEIGHT

- Size (H x W x D): 269 x 205 x 753 mm (10.59" x 8.07" x 29.64")
- Weight: 10 kg (22.04 lbs)

WARRANTY

- 3-year warranty⁴



CI Solutions
3625 Serpentine Drive
California
90720 Los Alamitos
United States
Tel : (562) 431-2594
Fax : (562) 493-2714
E-mail : sales@cardintegrators.com
Web : cardintegrators.com

US & CANADA

Evolis, Rising Sun Mills, 188 Valley St., Suite 421 - Providence, RI 02909
T: 401-751-5483 - F: 954-777-9267 - evolisnortham@evolis.com

HQ | EUROPE - MIDDLE-EAST - AFRICA - Angers - info@evolis.com

LATIN AMERICA - Miami - evolislatam@evolis.com

ASIA-PACIFIC - Singapore - evolisasia@evolis.com

CHINA - Shanghai - evolischina@evolis.com

JAPAN - Tokyo - evolisjapan@evolis.com

INDIA - Mumbai - evolisindia@evolis.com

©2017 Evolis. All rights reserved. Actual product(s) may differ from information stated in this document. All specifications or pictures are subject to change without prior notice. All trademarks mentioned herein belong to their respective owners. Pictures: François Charron. 05/2017. KB-PLA1-162-ENG-US Rev A7